

1/6

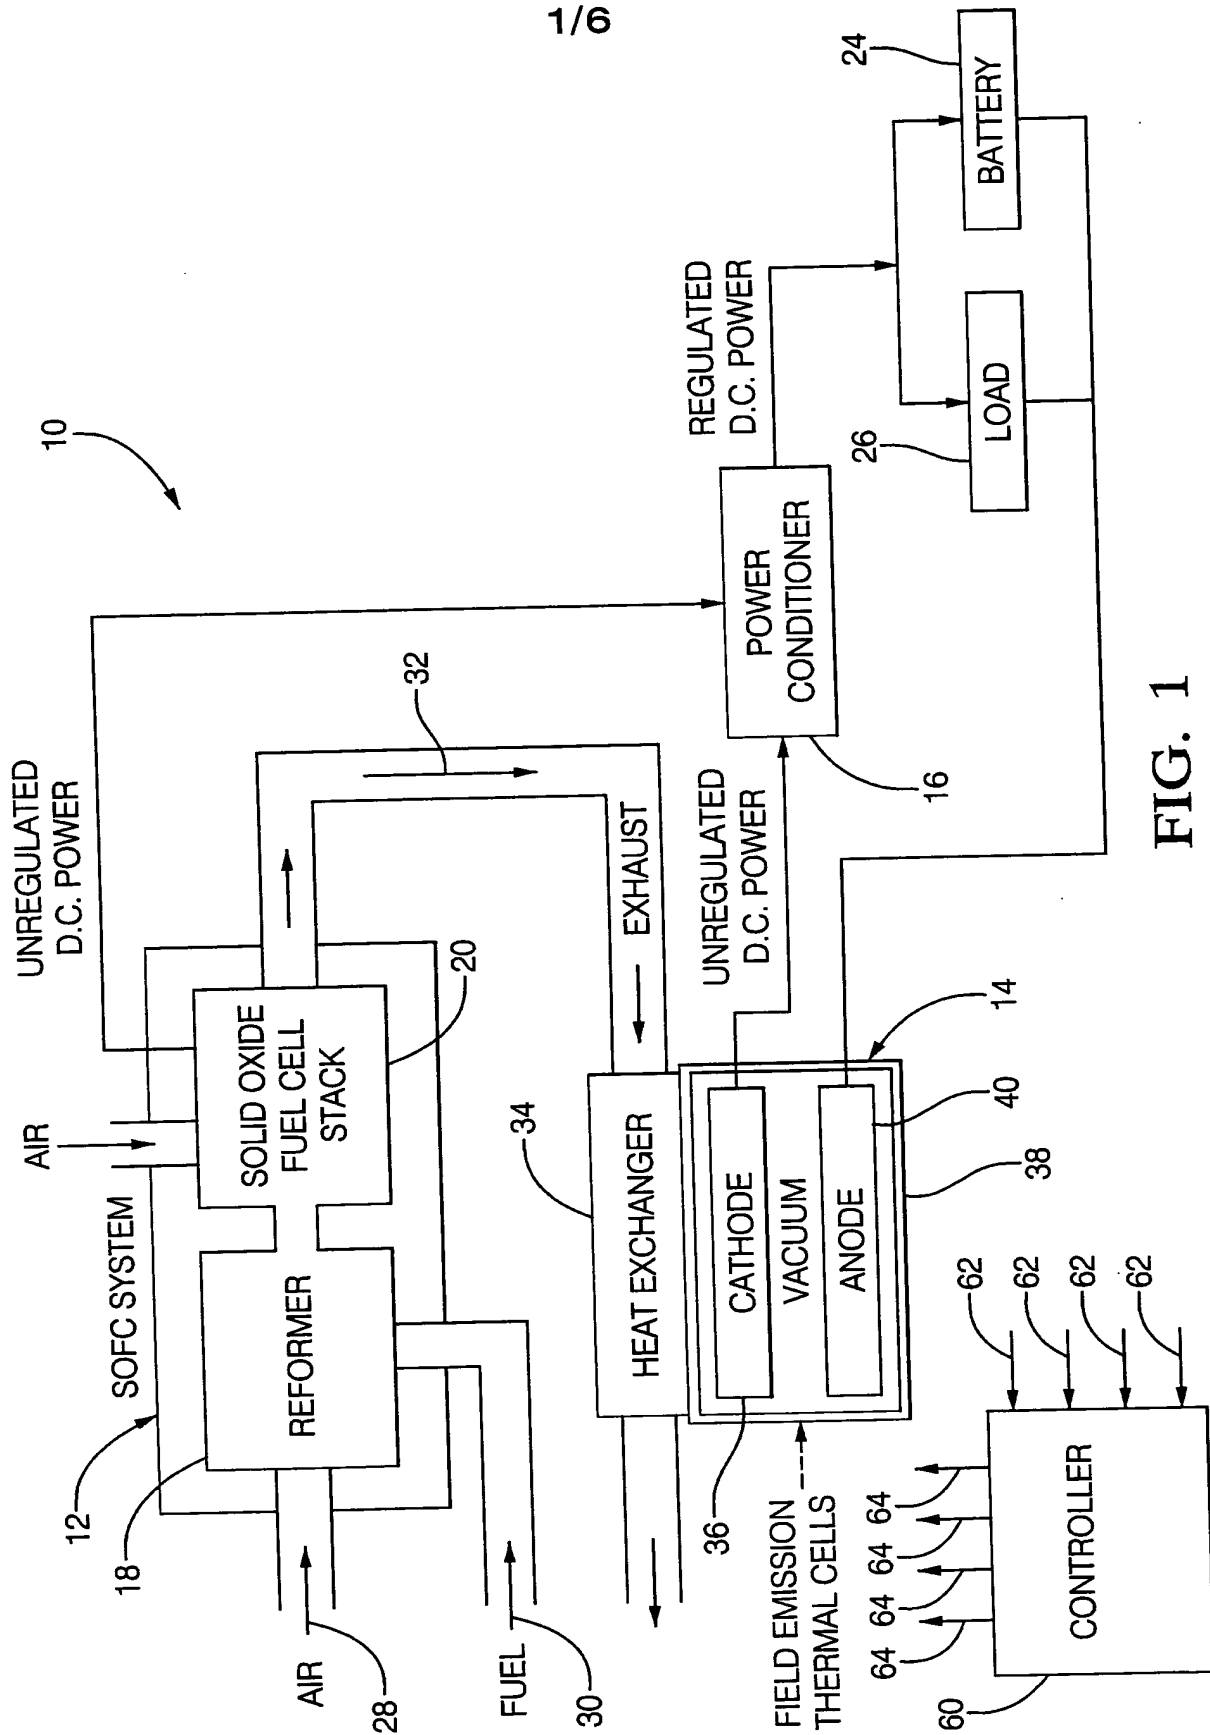


FIG. 1

2/6

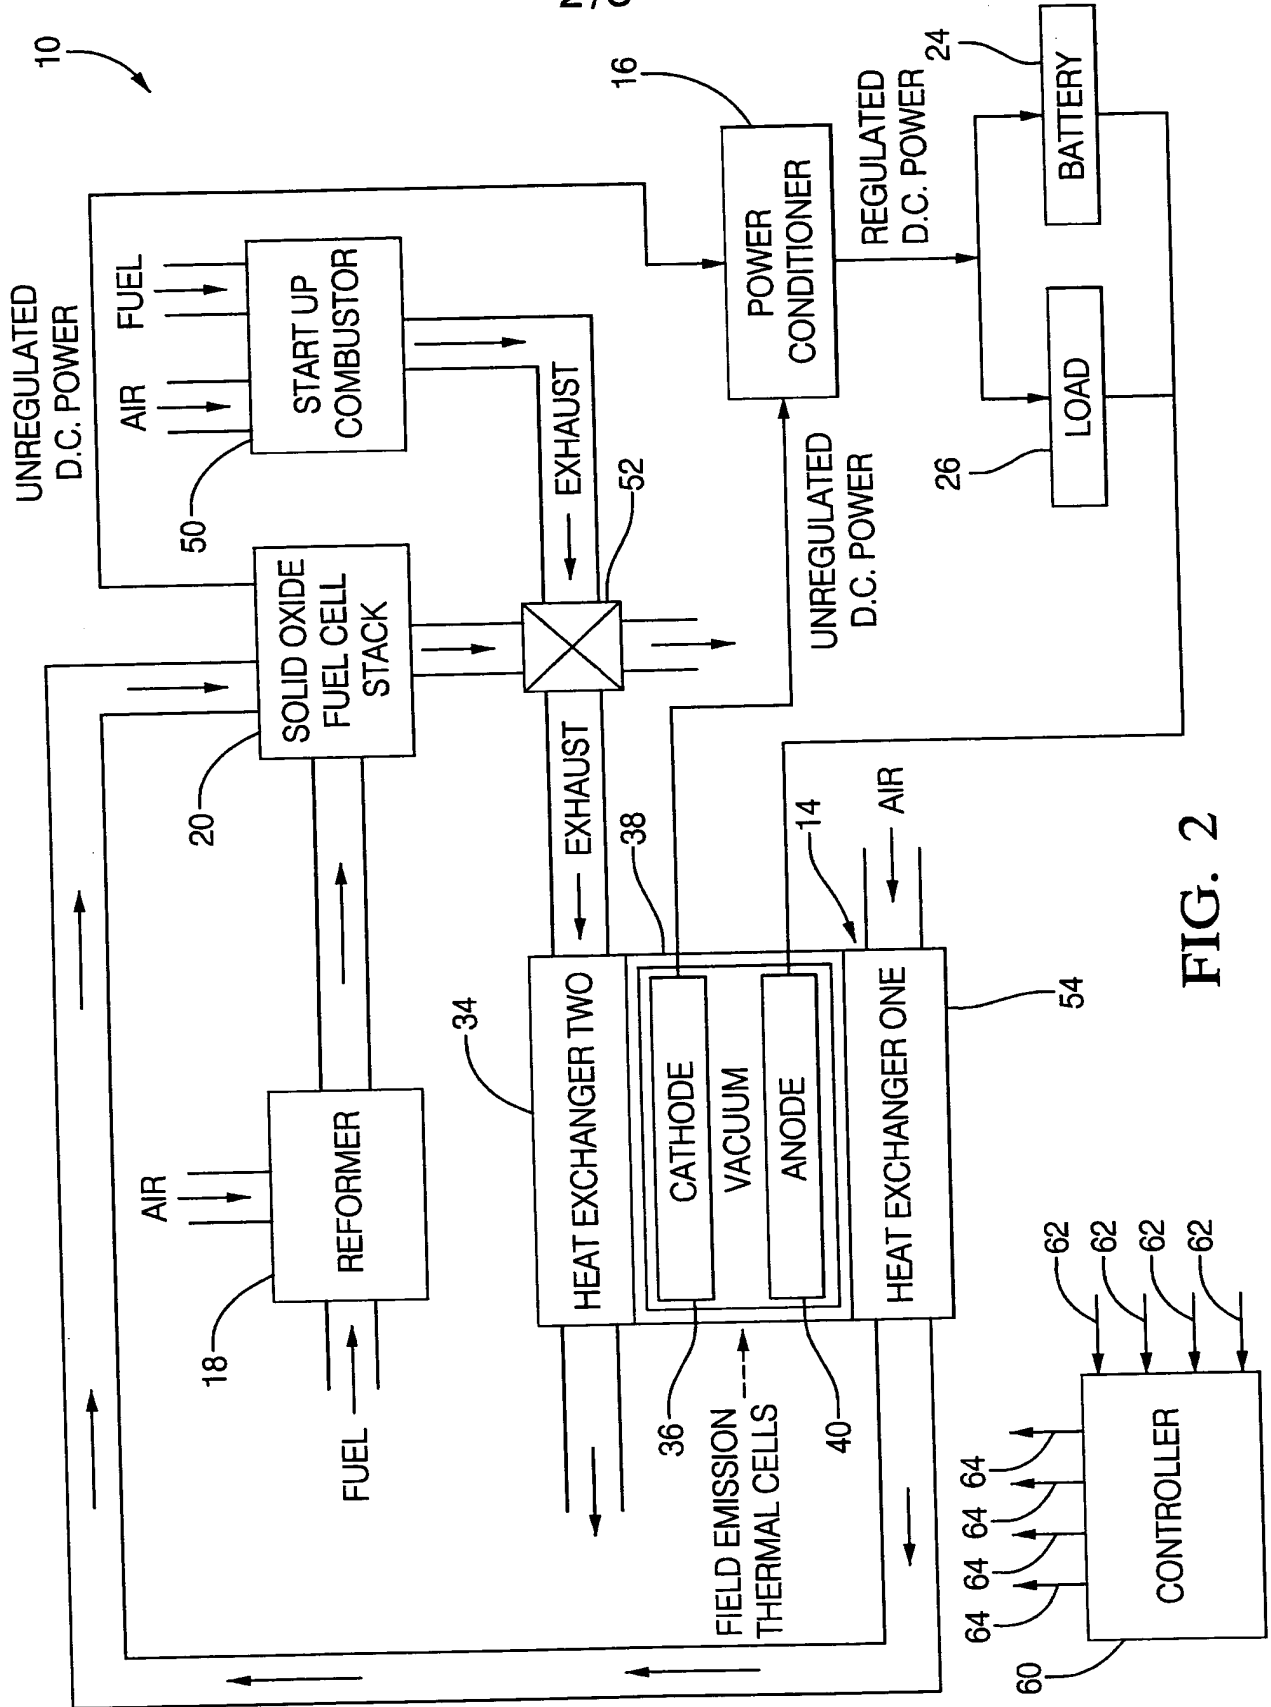


FIG. 2

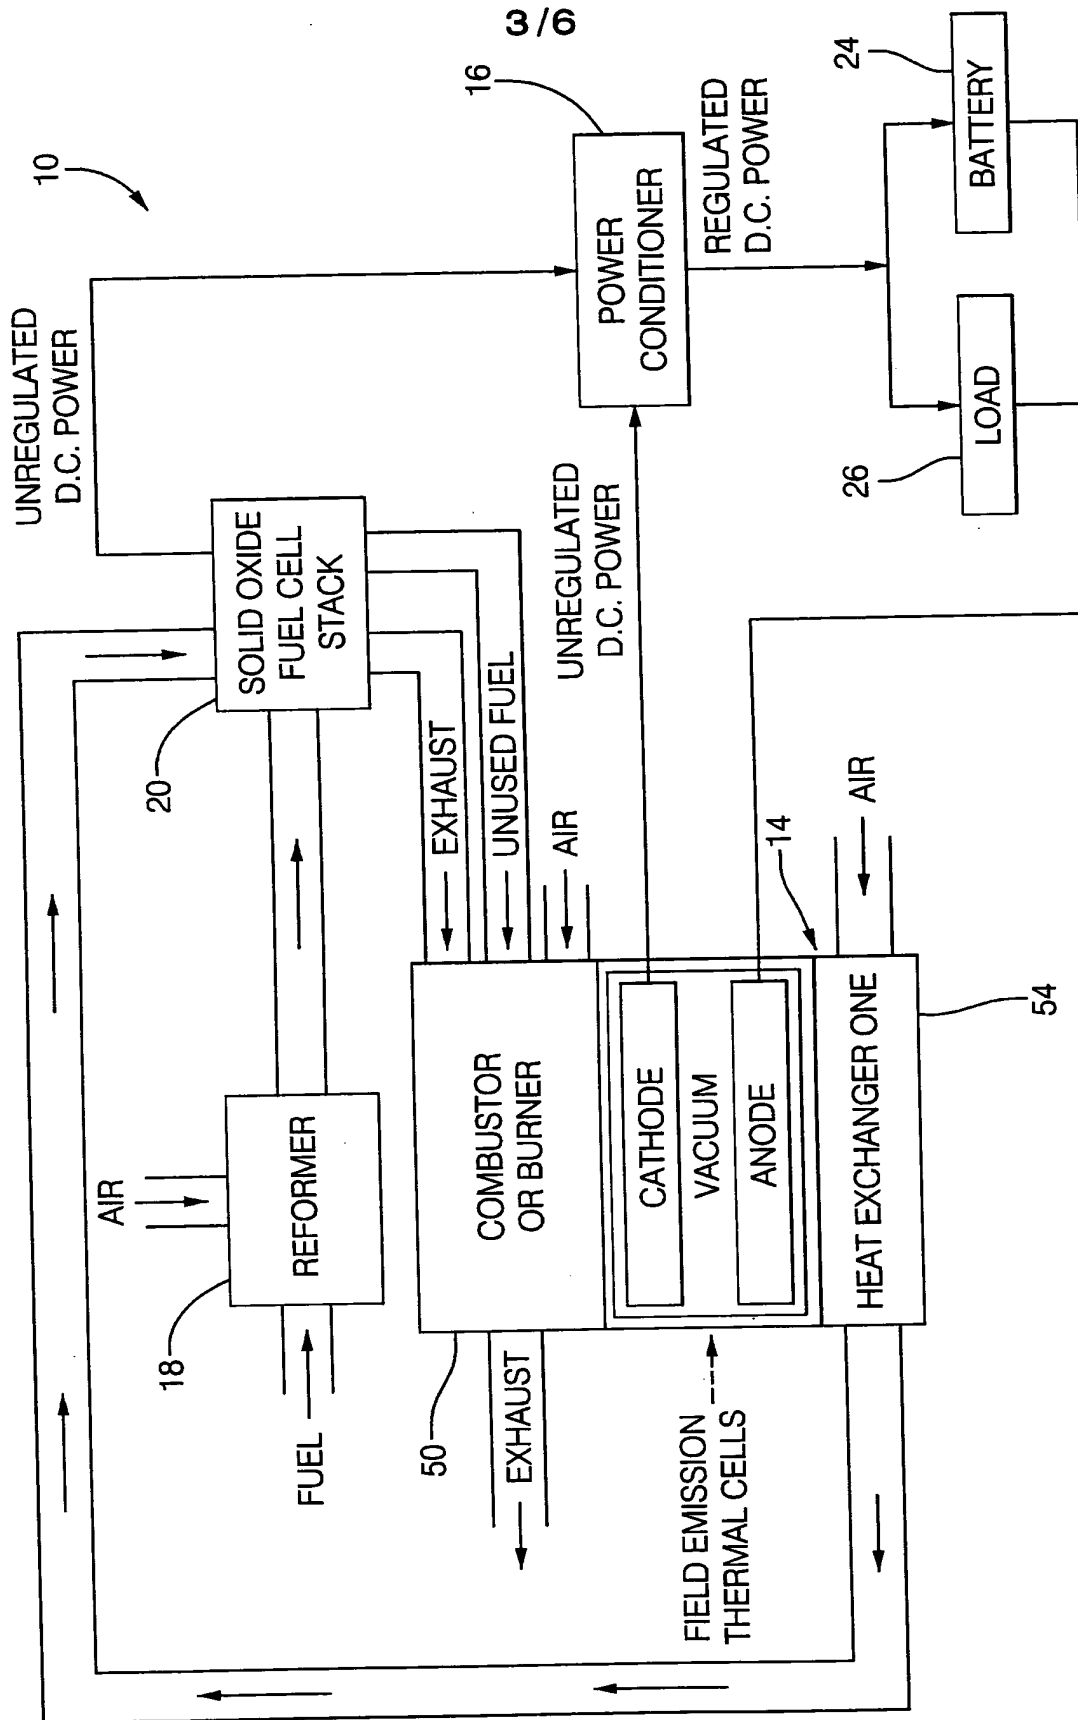
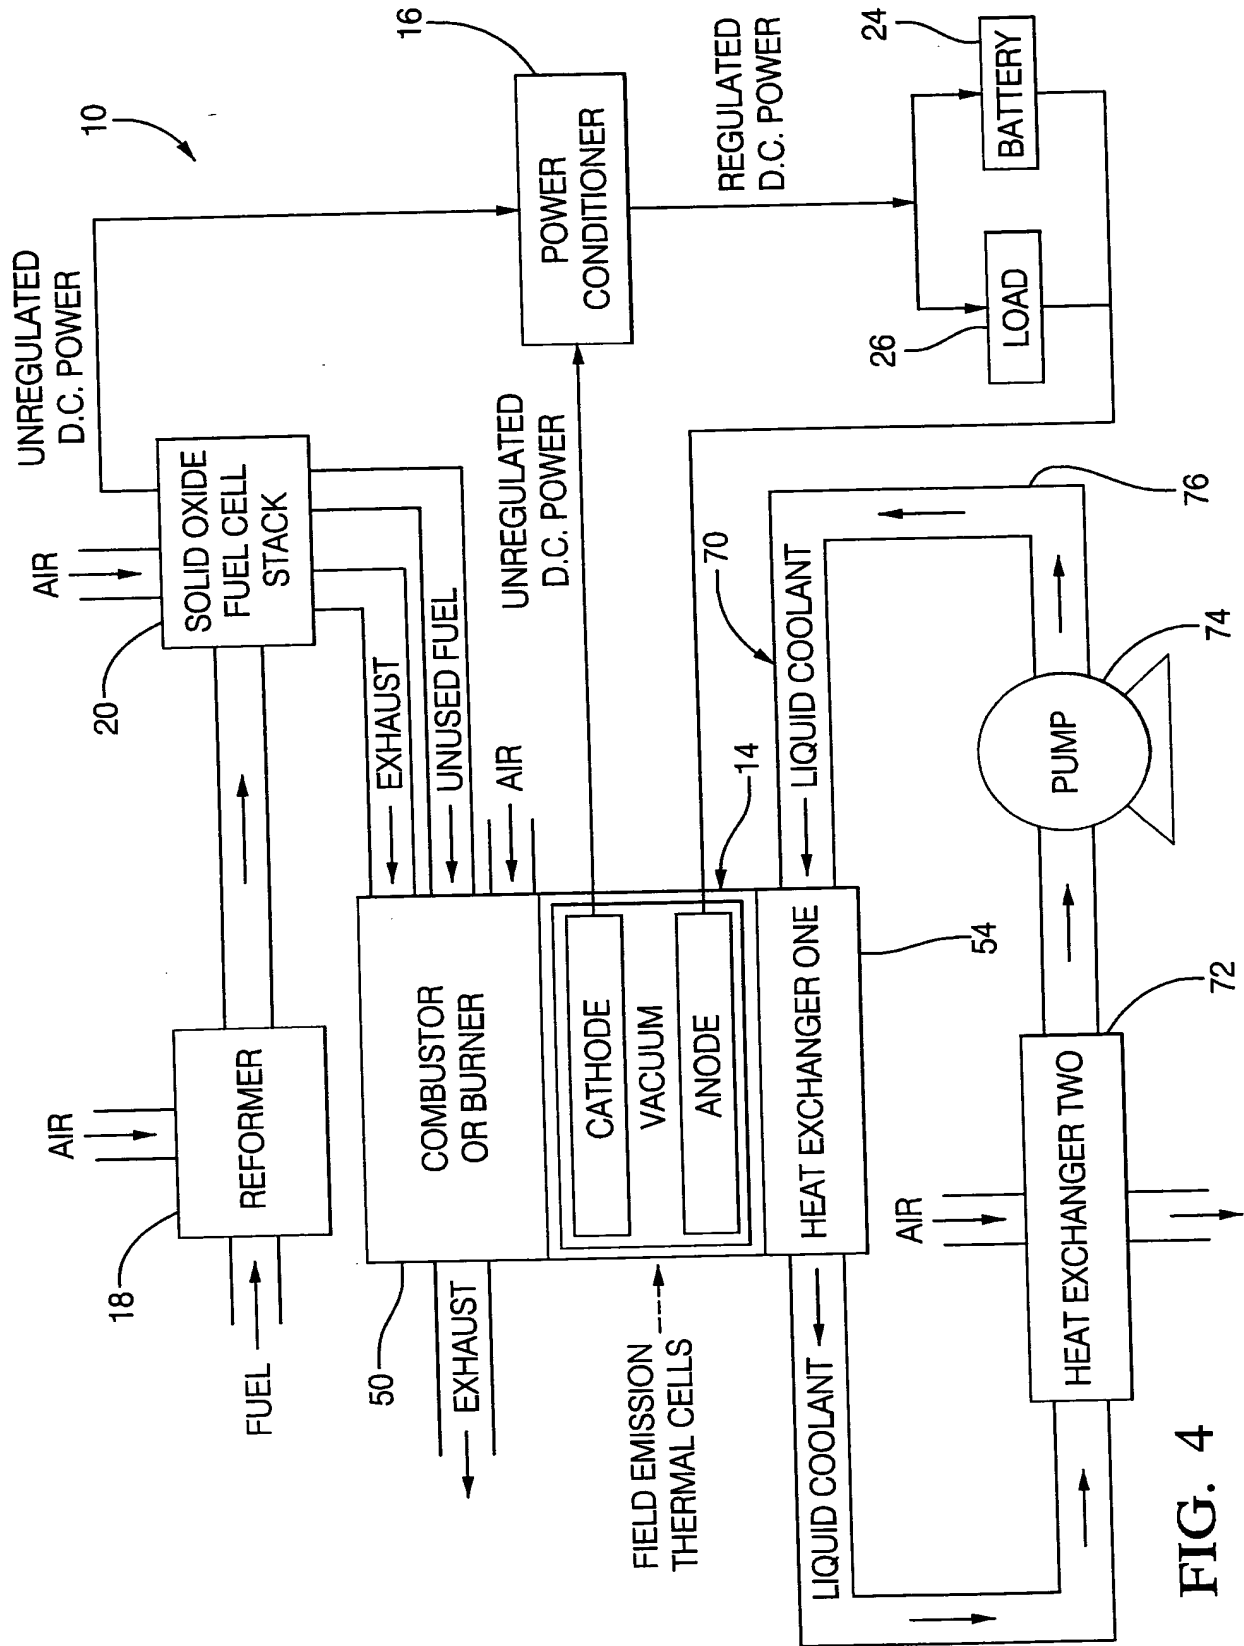


FIG. 3

4/6



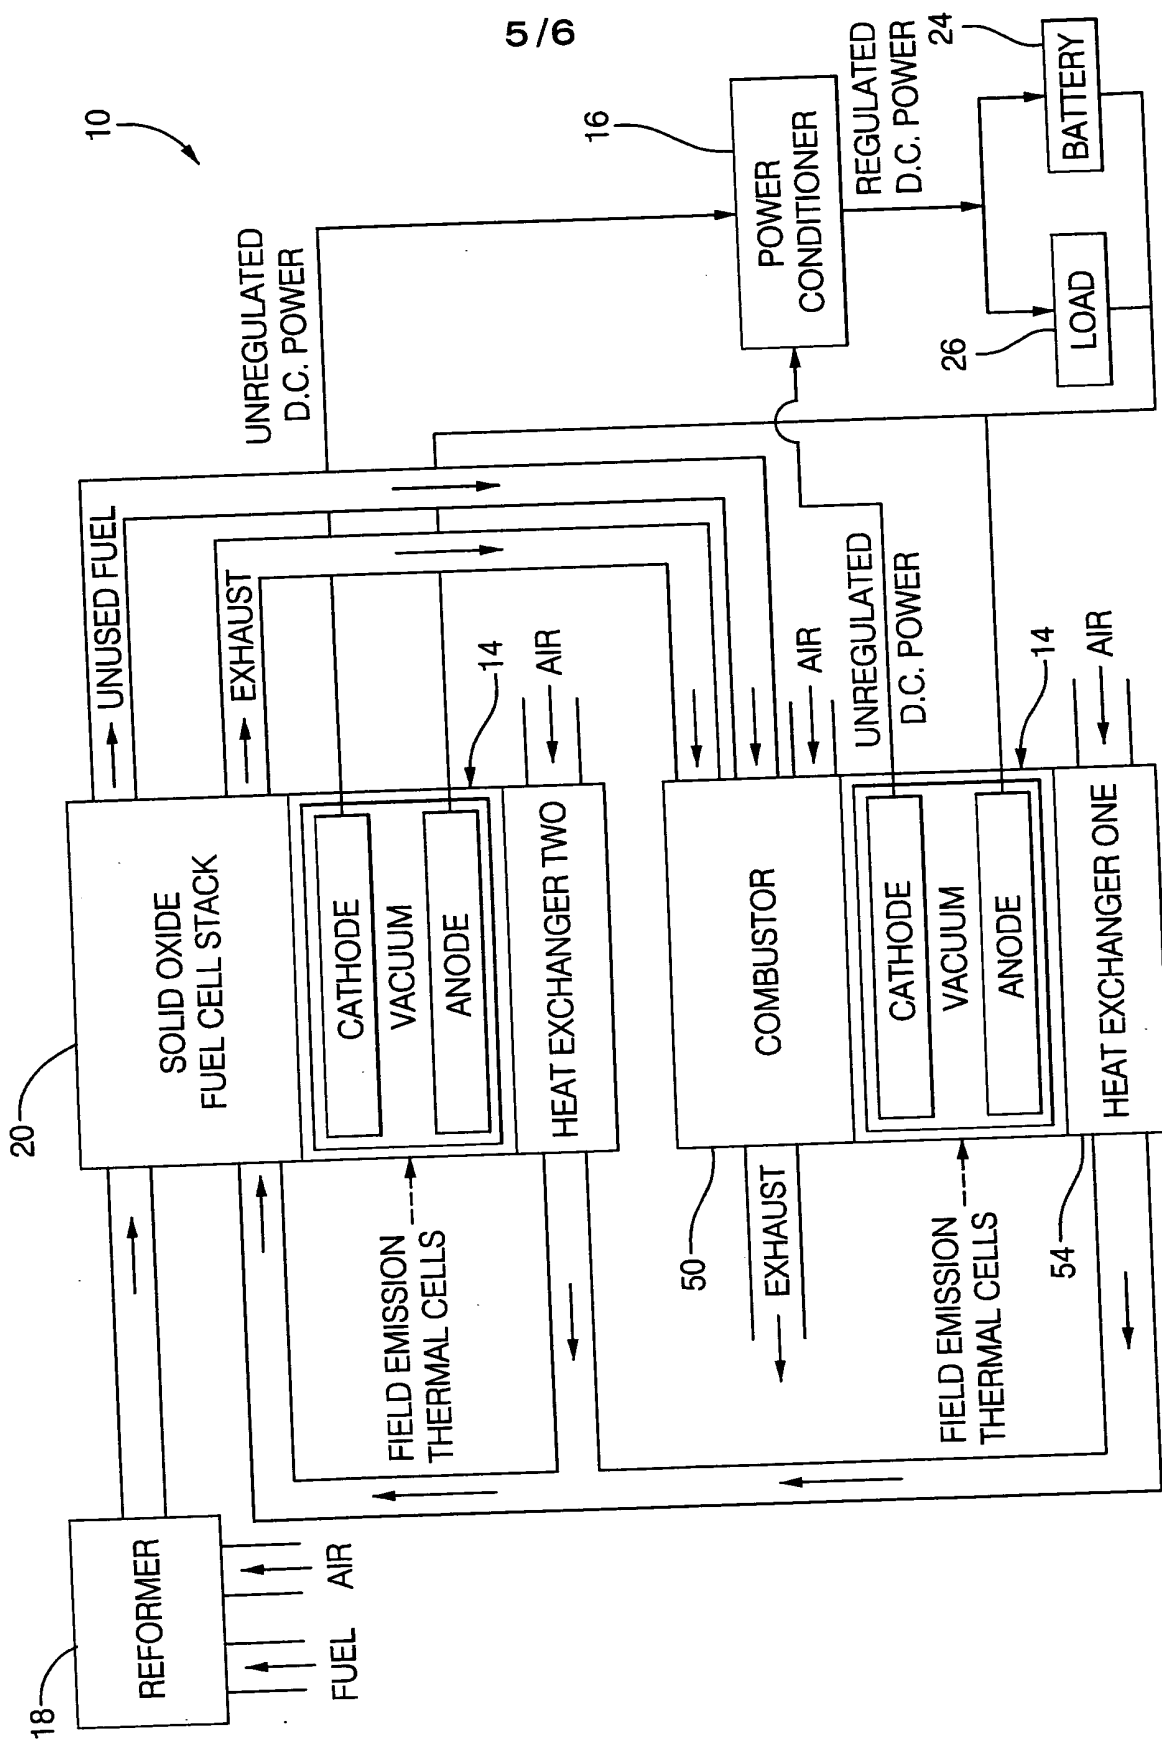


FIG. 5

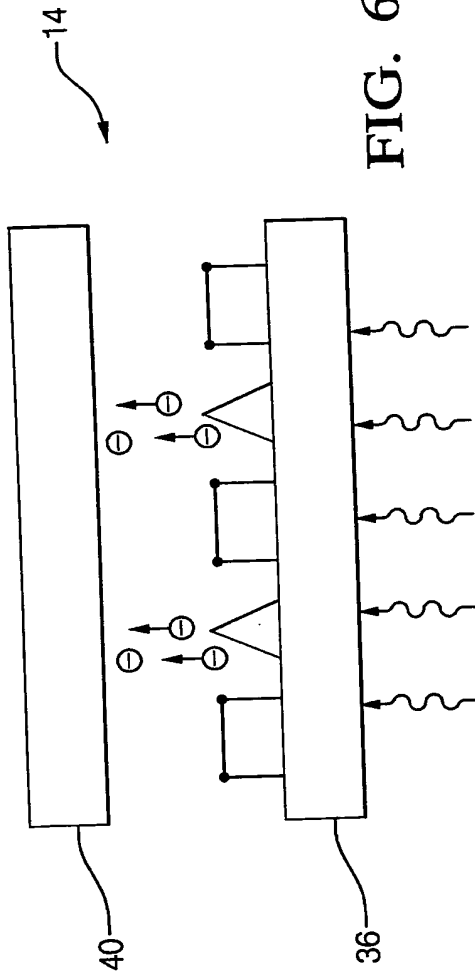


FIG. 6

				THERMO-ELECTRIC CONVERSION EFFICIENCY (20%) 10.0 WATTS/cm ^ 2					
				ASSUMES 65% UTILIZATION OF WASTE HEAT					

FIG. 7